

大通孔直径 中空卡盘 2爪, 4爪

MHT / MHF

Mega Bore 2-Jaw / 4-Jaw Ultrahigh-Speed Open-Center Chuck




HYDRAULIC CHUCK

- Mega Bore 2-jaw, 4-jaw high-speed wedge-style
- open-center power chuck
- 大通孔两爪、四爪楔式动力卡盘(液压)

See page 60-67
Gripping Force

Power Chuck

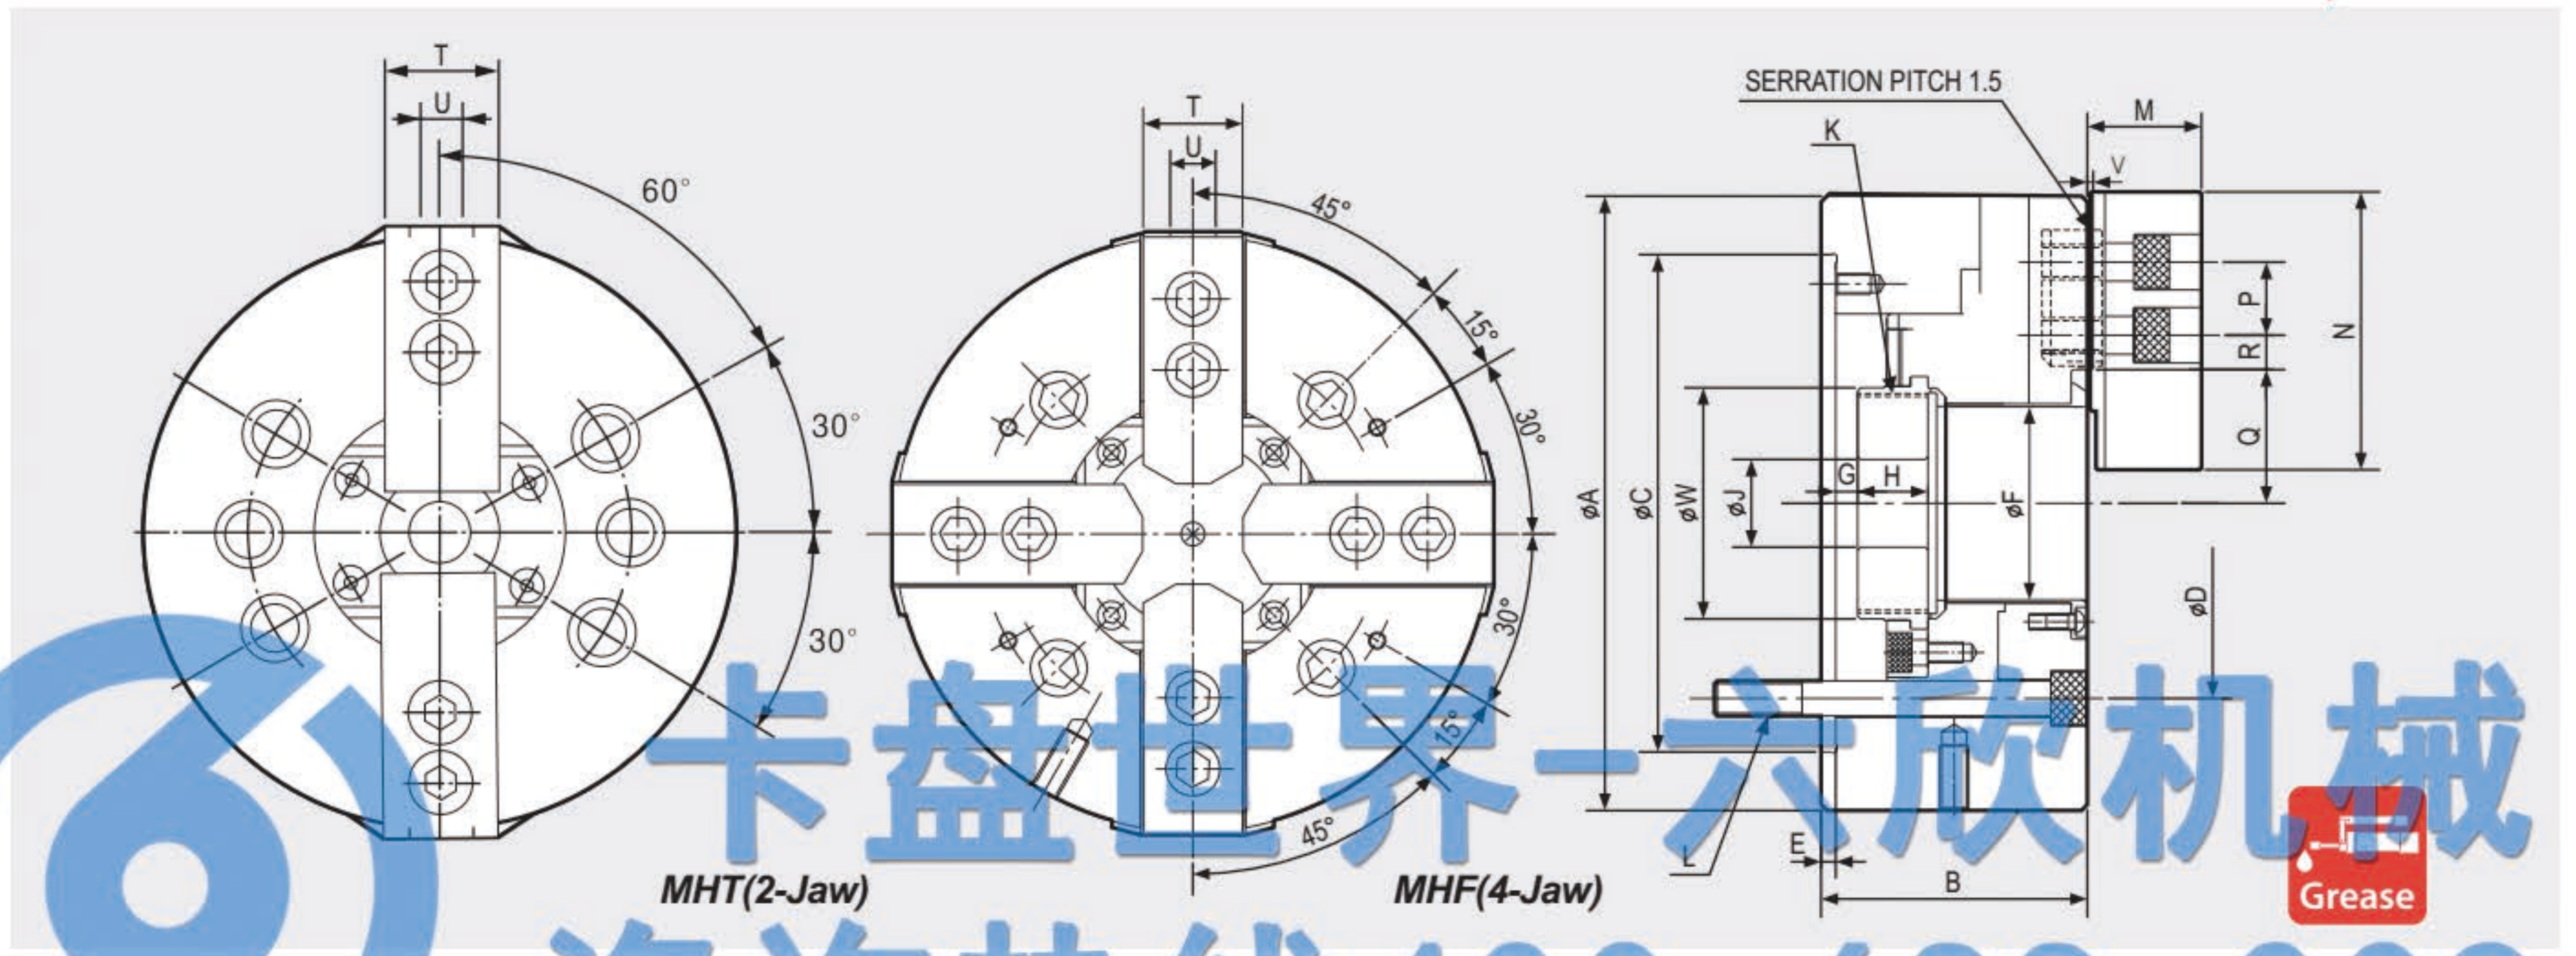

卡盘世界-六欣机械
咨询热线400-688-0096

	ΦA	B	ΦC(H6)	ΦD	E	ΦF	Gmax.	Gmin.	H	ΦJ	Kmax.	L	M	N	P	Qmax.	Qmin.	Rmax.	Rmin.	T	U	V	ΦW
MHT-206	175	81	40	104.8	5	52	14	-1	17.5	20	M60x2.0	6-M10x 95	32.5	72	20	38	34.8	21.75	10.25	31	12	2	65
MHT-208	210	91	170	133.4	5	66	7.5	-10	27	30	M75x2.0	6-M12x115	39	95	25	45.7	42	23.75	11.75	35	14	2	80
MHF-208	210	91	170	133.4	5	66	7.5	-10	27	30	M75x2.0	4-M12x115	39	95	25	45.7	42	23.75	11.75	35	14	2	80

※ Blank and machined draw-nuts are available.
※ "K" is Max. Draw nut size.

※ 提供毛坯和机加拉力螺母。
※ "K" 是拉杆螺母(Draw Nut)最大值。

Specifications

Type	Thru Hole Dia. [mm]	Grip Dia. [mm]	Jaw Stroke Dia. [mm]	Plunger Stroke [mm]	Max. Permissible Input Force [kN(kgf)]	Max. Static Gripping Force [kN(kgf)]	Max. R.P.M. [min ⁻¹ (r.p.m.)]	Weight [kgf]	GD ² [N·m ² (kgf·m ²)]	Operating Cylinder 工作缸	Max. Hydraulic Pressure [Mpa(kgf/cm ²)]	Operating Hard Jaw 工作硬爪	KITAGAWA® Model 北川型号
MHT-206	52	175 Max. 16.5 Min.	6.4	15	16.6(1700)	38(3875)	6000	11.5	2.2(0.225)	SYH-15052 (SYH-1552)	1.18(12)	HB06A1	-
MHT-208	66	210 Max. 23 Min.	7.4	17.5	23.5(2397)	57.9(5914)	5000	21.7	6.47(0.66)	SH-17068 (SYH-1768)	1.59(16.3)	HB06A1	-
MHF-208	66	210 Max. 23 Min.	7.4	17.5	23.25(2397)	57.9(5914)	5000	23.5	5.59(0.57)	SH-17068 (SYH-1768)	1.59(163.3)	HBF08A1	-

※ Maximum turning speed is based upon actual measurement.
※ Specifications are subject to change without notice.
※ Samchully Machinery Co., Ltd. is no longer an OEM manufacturer for Kitagawa® Iron Works Co., Ltd.

※ 最大转速基于实际测量。
※ 技术规格若发生改变, 恕不另行通知。
※ 三千里机械已结束与日本北川OEM生产。